

FOR VEHICLE CONTROL AND CONSTRUCTION SITE SAFETY

- Reduce Crossover Accidents
- Reduce Liability Exposure
- Reduce Vehicle Damage
- Reduce Traffic Fatalities

SPECIFICATIONS

- Approximate Weight per Panel: 10'-3,900 lb. (1,770 kg.), 20'-7,800 lb. (3,540 kg.)
- Laying Length per Panel: 10'-0" (3m), 20'-0" (6m)


OPTIONS

- End Loops for Pin Connection
- "Gawk" Screen Holes
- Fence Post Holes
- Lifting Devices
- Colored Concrete
- Fork Lift Pockets
- Scuppers

OTHER USES

- Excavation Enclosure
- Material Storage
- Retaining Wall
- Barricades
- Security

10' (3m) AND 20' (6m) BARRIER RAIL

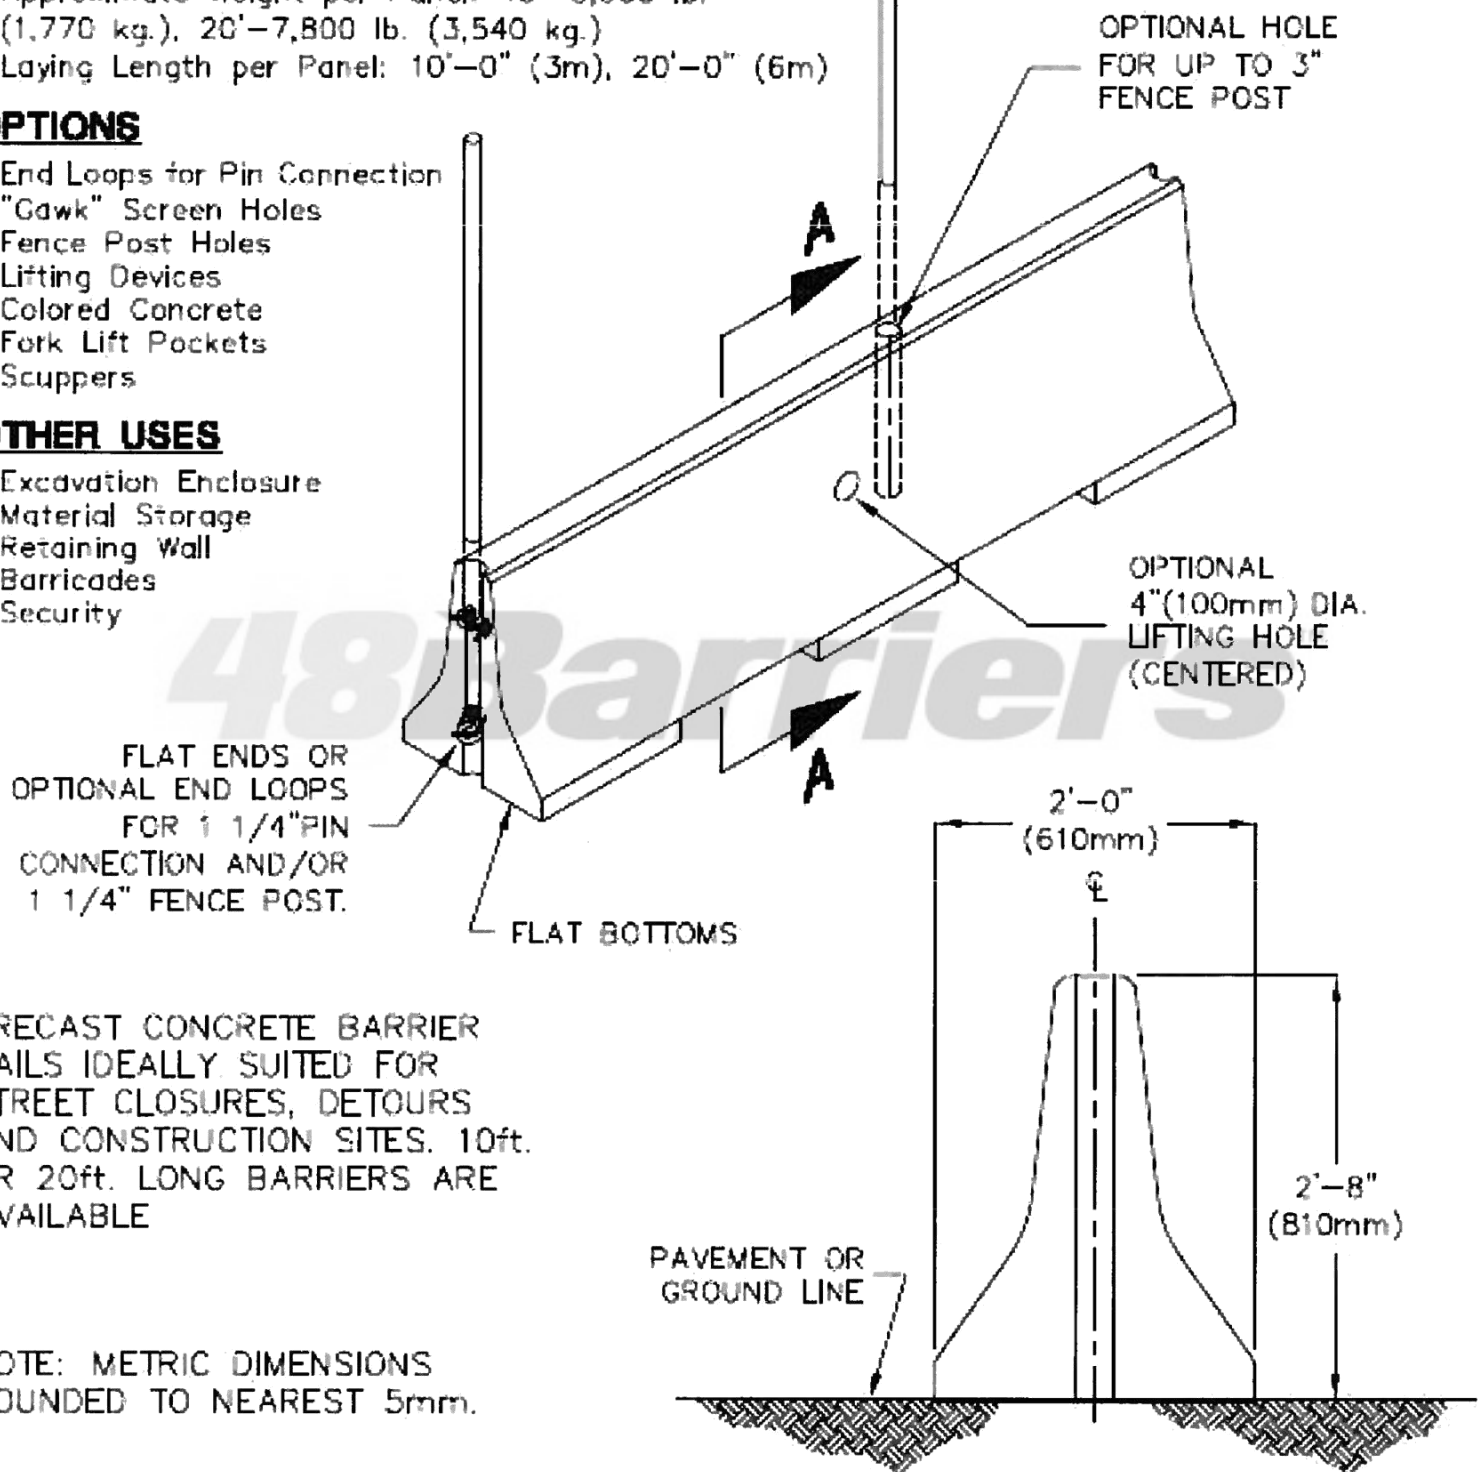

PRECAST CONCRETE BARRIER RAILS IDEALLY SUITED FOR STREET CLOSURES, DETOURS AND CONSTRUCTION SITES. 10ft. OR 20ft. LONG BARRIERS ARE AVAILABLE

NOTE: METRIC DIMENSIONS ROUNDED TO NEAREST 5mm.